

FRANKEN

Milling Technology

MULTI-Jet-Cut Duplex



HPC-Jet-Cut Duplex



We put performance into shape...

...with efficiency, strength and speed!

MULTI-Jet-Cut Duplex

With the **Duplex** tools, FRANKEN is treading new paths in milling. The term **Duplex** comes from Latin and means as much as “double” or “two-fold.” With the FRANKEN **Duplex** tools, both meanings apply. They make it possible to do pocket and slot milling (2D) as well as complex 3D operations like copy and high-feed milling with **only one tool**. The **Duplex series will reduce the number of tool places in your workshop!** In the face area, the **Duplex** cutter has a ground double-radius geometry (**Duplex geometry**) which permits highest feeds with appropriate axial depth-of-cut values. The name **Duplex** thus refers not only to the variety of possible applications but also to the new, patented cutting geometry.

Advantages

- High flexibility due to two constructional lengths
- Low machining forces due to roughing serration
- No tendency to vibrate due to variable irregular spacing
- Perfect chip transport due to S-geometry on the tool face
- Internal coolant-lubricant supply (IKZ) as standard
- Maximum application flexibility by combining two tools in one
- Reduction of tool places and tool changes in your machine



What is the right application for the MULTI-Jet-Cut Duplex?

The special feature of the **MULTI-Jet-Cut Duplex** is the newly developed high-feed geometry on the cutting face. This special geometry permits extremely high feed-per-tooth values with adjusted depth of cut. The circumference cutting edge with the highly successful **MULTI-Jet-Cut** roughing serration makes extremely high machining volumes possible in milling. The coolant-lubricant supply integrated into the cutters as standard improves chip transport in a dramatic way. This helps to considerably improve tool life as well as process safety with high feed values. We recommend this tool for the machining of materials with a hardness of up to approx. 48 HRC. For the machining of even harder materials up to 66 HRC, we recommend our tool type **HPC-Jet-Cut Duplex** (see pages 4-5).

Application cases for the MULTI-Jet-Cut Duplex

- Pocket milling jobs of any kind where there are no requirements as to surface quality
- 2D roughing applications, slots, pockets with normal NC cycles
- Relief milling jobs of any kind
- 3D roughing applications, high-feed milling, line-by-line and copy milling to finishing allowance
- Helical drill milling, drill milling

Application example 1:

3D roughing job: 3D contour, length 160 mm x width 160 mm x height 30 mm
 Material: Cold work steel 1.2312 (1000 N/mm²) – cooling with internal air supply and cold-air nozzle ¹⁾
 Tool: **MULTI-Jet-Cut Duplex** dia. 10 mm (art. no. 2614AZ.010)
 Cutting data: v_c 250 m/min – f_z 0.38 mm – a_p 0.7 mm – a_e 6 mm

Application example 2:

2D roughing job: Pocket milling, length 60 mm x width 60 mm x depth 22 mm
 Material: Tool steel 1.1730 (800 N/mm²) – cooling with internal air supply and cold-air nozzle ¹⁾
 Tool: **MULTI-Jet-Cut Duplex** dia. 10 mm (art. no. 2614AZ.010)
 Cutting data: v_c 180 m/min – f_z 0.06 mm – a_p 11 mm – a_e 6 bis 10 mm

Application example 3:

2D roughing job: Slot milling, length 160 mm x width 10 mm x depth 15 mm
 Material: Cold work steel 1.2085 (1100 N/mm²) – cooling with internal air supply and cold-air nozzle ¹⁾
 Tool: **MULTI-Jet-Cut Duplex** dia. 10 mm (art. no. 2614AZ.010)
 Cutting data: v_c 120 m/min – f_z 0.05 mm – a_p 15 mm – a_e 10 mm

Additional technical information:


- Always provide tool holders with good concentricity and high holding force
- Before clamping the tool, clean all clamping surfaces completely from grease and oil
- Ramping angle 3-15°, feed speed (v_f) 100% - 50%, adjust to individual ramping angle
- Down-milling will lead to better tool life

¹⁾ Cold-air nozzle, see page 6


For videos about the application examples, see our homepage www.emuge-franken.de, under **Media/Downloads**

End mills MULTI-Jet-Cut Duplex – short design

DIN 6527 L

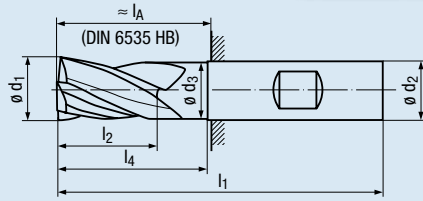

θd_1 h11	l_2	l_1	l_4	l_A	θd_2 h6	θd_3	t_{max}	R_{3D}	r_1 / r_2	Z	Shank acc. DIN 6535 HA Article no.	Shank acc. DIN 6535 HB Article no.
6	13	57	20	21	6	5.8	0.2	0.8	2.9 / 0.6	4	2614AZ.006	2615AZ.006
8	19	63	25	27	8	7.7	0.3	1.0	3.9 / 0.8	4	2614AZ.008	2615AZ.008
10	22	72	30	32	10	9.5	0.4	1.2	4.9 / 1.0	4	2614AZ.010	2615AZ.010
12	26	83	35	38	12	11.5	0.4	1.6	5.9 / 1.2	4	2614AZ.012	2615AZ.012
16	32	92	40	44	16	15.5	0.5	2.2	7.8 / 1.6	4	2614AZ.016	2615AZ.016




t_{max} = Maximum residual material produced by radius deviation from R_{3D}
 R_{3D} = Radius to be programmed in the CAM
 r_1 = Face radius
 r_2 = Tangential radius between face radius and circumference cutting edge


	HPC and roughing applications				HSC and high-feed machining				Cooling	Lubrication
	v_c [m/min]	f_z [mm]	a_p max. [mm]	a_e max. [mm]	v_c [m/min]	f_z max. [mm]	a_p max. [mm]	a_e [mm]		
1										
1.1	160 - 180	0.0065 x d_1	1.5 x d_1	1 x d_1	240 - 260	0.04 x d_1	0.06 x d_1	0.6 x d_1	Cold air / Pressurized air	Emulsion / MQL
1.2	140 - 160	0.0055 x d_1	1.5 x d_1	1 x d_1	220 - 240	0.04 x d_1	0.06 x d_1	0.6 x d_1	Cold air / Pressurized air	Emulsion / MQL
1.3	120 - 140	0.005 x d_1	1 x d_1	1 x d_1	200 - 220	0.03 x d_1	0.05 x d_1	0.6 x d_1	Cold air / Pressurized air	—
1.4	100 - 120	0.004 x d_1	1 x d_1	1 x d_1	180 - 200	0.03 x d_1	0.04 x d_1	0.6 x d_1	Cold air / Pressurized air	—
1.5	80 - 100	0.004 x d_1	1 x d_1	1 x d_1	160 - 180	0.02 x d_1	0.035 x d_1	0.6 x d_1	Cold air / Pressurized air	—
1.6	50 - 80	0.003 x d_1	1 x d_1	1 x d_1	120 - 160	0.015 x d_1	0.03 x d_1	0.6 x d_1	Cold air	—
2										
2.1 - 2.2	100 - 160	0.005 x d_1	1.5 x d_1	1 x d_1	180 - 200	0.05 x d_1	0.07 x d_1	0.6 x d_1	Cold air / Pressurized air	—
2.3 - 2.4	80 - 120	0.004 x d_1	1 x d_1	1 x d_1	160 - 180	0.04 x d_1	0.07 x d_1	0.6 x d_1	Cold air / Pressurized air	—
3										
3.2 - 3.3	140 - 160	0.005 x d_1	1 x d_1	1 x d_1	180 - 200	0.04 x d_1	0.07 x d_1	0.6 x d_1	—	Emulsion / MQL
3.4 - 3.5	120 - 140	0.005 x d_1	1 x d_1	1 x d_1	160 - 180	0.04 x d_1	0.06 x d_1	0.6 x d_1	—	Emulsion / MQL
8										
8.1	140 - 160	0.006 x d_1	1.5 x d_1	1 x d_1	200 - 220	0.05 x d_1	0.07 x d_1	0.6 x d_1	—	Emulsion / MQL
9										
9.2	60 - 100	0.004 x d_1	1 x d_1	1 x d_1	100 - 140	0.035 x d_1	0.07 x d_1	0.6 x d_1	—	Emulsion / MQL

End mills MULTI-Jet-Cut Duplex – long design

Internal standard

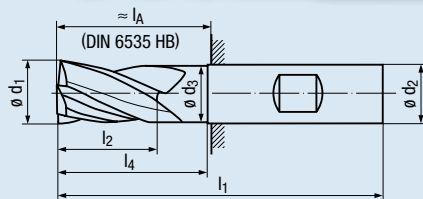

θd_1 h11	l_2	l_1	l_4	l_A	θd_2 h6	θd_3	t_{max}	R_{3D}	r_1 / r_2	Z	Shank acc. DIN 6535 HA Article no.	Shank acc. DIN 6535 HB Article no.
8	19	68	30	32	8	7.7	0.3	1.0	3.9 / 0.8	4	2616AZ.008	2617AZ.008
10	22	80	35	40	10	9.5	0.4	1.2	4.9 / 1.0	4	2616AZ.010	2617AZ.010
12	26	93	45	47	12	11.5	0.4	1.6	5.9 / 1.2	4	2616AZ.012	2617AZ.012
16	32	108	55	60	16	15.5	0.5	2.2	7.8 / 1.6	4	2616AZ.016	2617AZ.016



t_{max} = Maximum residual material produced by radius deviation from R_{3D}
 R_{3D} = Radius to be programmed in the CAM
 r_1 = Face radius
 r_2 = Tangential radius between face radius and circumference cutting edge

	HPC and roughing applications				HSC and high-feed machining				Cooling	Lubrication
	v_c [m/min]	f_z [mm]	a_p max. [mm]	a_e max. [mm]	v_c [m/min]	f_z max. [mm]	a_p max. [mm]	a_e [mm]		
1										
1.1	140 - 160	0.0055 x d_1	1 x d_1	1 x d_1	240 - 260	0.04 x d_1	0.05 x d_1	0.6 x d_1	Cold air / Pressurized air	Emulsion / MQL
1.2	120 - 140	0.0055 x d_1	1 x d_1	1 x d_1	220 - 240	0.04 x d_1	0.05 x d_1	0.6 x d_1	Cold air / Pressurized air	Emulsion / MQL
1.3	120 - 140	0.005 x d_1	1 x d_1	1 x d_1	200 - 220	0.03 x d_1	0.04 x d_1	0.6 x d_1	Cold air / Pressurized air	—
1.4	100 - 120	0.004 x d_1	1 x d_1	1 x d_1	180 - 200	0.03 x d_1	0.035 x d_1	0.6 x d_1	Cold air / Pressurized air	—
1.5	80 - 100	0.004 x d_1	1 x d_1	1 x d_1	160 - 180	0.02 x d_1	0.03 x d_1	0.6 x d_1	Cold air / Pressurized air	—
1.6	50 - 80	0.003 x d_1	1 x d_1	0.5 x d_1	120 - 160	0.015 x d_1	0.025 x d_1	0.6 x d_1	Cold air	—
2										
2.1 - 2.2	100 - 160	0.005 x d_1	1 x d_1	1 x d_1	180 - 200	0.05 x d_1	0.06 x d_1	0.6 x d_1	Cold air / Pressurized air	—
2.3 - 2.4	80 - 120	0.004 x d_1	1 x d_1	1 x d_1	160 - 180	0.04 x d_1	0.06 x d_1	0.6 x d_1	Cold air / Pressurized air	—
3										
3.2 - 3.3	140 - 160	0.005 x d_1	1 x d_1	1 x d_1	180 - 200	0.04 x d_1	0.06 x d_1	0.6 x d_1	—	Emulsion / MQL
3.4 - 3.5	120 - 140	0.005 x d_1	1 x d_1	1 x d_1	160 - 180	0.04 x d_1	0.06 x d_1	0.6 x d_1	—	Emulsion / MQL
8										
8.1	140 - 160	0.006 x d_1	1.5 x d_1	1 x d_1	200 - 220	0.05 x d_1	0.07 x d_1	0.6 x d_1	—	Emulsion / MQL
9										
9.2	60 - 100	0.004 x d_1	1 x d_1	1 x d_1	100 - 140	0.035 x d_1	0.06 x d_1	0.6 x d_1	—	Emulsion / MQL

HPC-Jet-Cut Duplex

The **HPC-Jet-Cut Duplex** is designed for the machining of hard materials. The extremely wear-resistant carbide substrate in connection with the newly developed cutting geometry and, of course, a high-heat-resistant coating, make it at last possible to work out machining strategies with just one tool instead of the two tools needed until now as a minimum. Any kind of 2D operation, like pocket and slot milling, or 3D operations like line-by-line milling, copy milling and high-feed roughing of contours can now be done with one tool only, due to the redevelopment of our patented cutting geometry. The **HPC-Jet-Cut Duplex** permits the machining of soft and hardened steels with a hardness of up to 66 HRC, cast materials, brass and similar materials.

Advantages

- High flexibility due to two constructional lengths
- Stable cutting geometry due to radial relief
- No tendency to vibrate due to variable irregular spacing
- Perfect chip transport due to S-geometry on the tool face
- Internal coolant-lubricant supply (IKZ) as standard
- Maximum application flexibility by combining two tools in one
- Reduction of tool places and tool changes in your machine



What is the right application for the HPC-Jet-Cut Duplex?

In tool making and in the mold-and-die industry, this tool can be used for roughing and finishing applications in 3D components, as well as for pocket and slot milling in any kind of mold construction. The design of the face geometry permits the machining of all short-chipping materials without any problem. The coolant-lubricant supply integrated into the tools improves chip transport dramatically. Tool life and process safety with high feeds can be extended considerably. We recommend this tool for the machining of materials with a hardness from 35 HRC to approximately 66 HRC.

For the machining of softer materials, like construction steel etc., we recommend our tool type **MULTI-Jet-Cut Duplex** (see pages 2-3).

Application cases for the HPC-Jet-Cut Duplex

- Pocket milling jobs of any kind where there are no requirements as to surface quality
- 2D roughing applications, slots, pockets with normal NC cycles
- Relief milling jobs of any kind
- 3D roughing applications, high-feed milling, line-by-line and copy milling to finishing allowance
- Helical drill milling, drill milling

Application example 1:

2D roughing job: Contour milling, length 160 mm x width 5 mm x height 15 mm
 Material: Cold work steel 1.2312 (hardened to 53 HRC) – cooling with internal air supply and cold-air nozzle ¹⁾
 Tool: **HPC-Jet-Cut Duplex** dia. 10 mm (art. no. 2610AZ.010)
 Cutting data: v_c 80 m/min – f_z 0.03 mm – a_p 15 mm – a_e 5 mm

Application example 2:

2D roughing job: Pocket milling, length 60 mm x width 60 mm x depth 15 mm
 Material: Cold work steel 1.2379 (hardened to 56 HRC) – cooling with internal air supply and cold-air nozzle ¹⁾
 Tool: **HPC-Jet-Cut Duplex** dia. 10 mm (art. no. 2610AZ.010)
 Cutting data HSC: v_c 120 m/min – f_z 0.20 mm – a_p 0.4 mm – a_e 6 mm (**machining time approx. 10 minutes**)
 Cutting data HPC: v_c 80 m/min – f_z 0.03 mm – a_p 7.5 mm – a_e 5 mm (**machining time approx. 6 minutes**)

Application example 3:

2D roughing job: Circular slot milling, length 30 mm x width 20 mm x depth 15 mm
 Material: Cold work steel 1.2379 (hardened to 60 HRC) – cooling with internal air supply and cold-air nozzle ¹⁾
 Tool: **HPC-Jet-Cut Duplex** dia. 10 mm (art. no. 2610AZ.010)
 Cutting data: v_c 100 m/min – f_z 0.06 mm – a_p 15 mm – a_e 1 mm


Additional technical information:

- Always provide tool holders with good concentricity and high holding force
- Before clamping the tool, clean all clamping surfaces completely from grease and oil
- Ramping angle in long-chipping materials 3-5°, reduce feed speed (v_f) by approx. 50%
- Down-milling will lead to better tool life


¹⁾ Cold-air nozzle, see page 6

End mills HPC-Jet-Cut Duplex – short design

DIN 6527 L

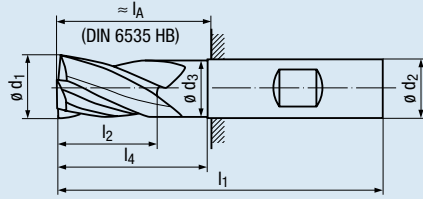

θd_1	l_2	l_1	l_4	I_A	θd_2	θd_3	t_{max}	R_{3D}	r_1 / r_2	Z	Shank acc. DIN 6535 HA	Shank acc. DIN 6535 HB
-0.04					h_5						Article no.	Article no.
6	13	57	20	21	6	5.8	0.2	0.8	2.9 / 0.6	4	2610AZ.006	2611AZ.006
8	19	63	25	27	8	7.7	0.3	1.0	3.9 / 0.8	4	2610AZ.008	2611AZ.008
10	22	72	30	32	10	9.5	0.4	1.2	4.9 / 1.0	4	2610AZ.010	2611AZ.010
12	26	83	35	38	12	11.5	0.4	1.6	5.9 / 1.2	4	2610AZ.012	2611AZ.012
16	32	92	40	44	16	15.5	0.5	2.2	7.8 / 1.6	4	2610AZ.016	2611AZ.016




t_{max} = Maximum residual material produced by radius deviation from R_{3D}
 R_{3D} = Radius to be programmed in the CAM
 r_1 = Face radius
 r_2 = Tangential radius between face radius and circumference cutting edge


	HPC and roughing applications				HSC and high-feed machining				Cooling	Lubrication
	v_c [m/min]	f_z [mm]	a_p max. [mm]	a_e max. [mm]	v_c [m/min]	f_z max. [mm]	a_p max. [mm]	a_e [mm]		
1										
1.1	180 - 200	0.005 x d_1	1.5 x d_1	1 x d_1	280 - 300	0.04 x d_1	0.06 x d_1	0.6 x d_1	Cold air / Pressurized air	Emulsion / MQL
1.2	160 - 180	0.005 x d_1	1.5 x d_1	1 x d_1	260 - 280	0.03 x d_1	0.05 x d_1	0.6 x d_1	Cold air / Pressurized air	Emulsion / MQL
1.3	140 - 160	0.004 x d_1	1 x d_1	1 x d_1	240 - 260	0.025 x d_1	0.04 x d_1	0.6 x d_1	Cold air / Pressurized air	—
1.4	120 - 140	0.004 x d_1	1 x d_1	1 x d_1	220 - 240	0.025 x d_1	0.04 x d_1	0.6 x d_1	Cold air / Pressurized air	—
1.5	100 - 120	0.003 x d_1	1 x d_1	1 x d_1	180 - 200	0.02 x d_1	0.035 x d_1	0.6 x d_1	Cold air / Pressurized air	—
1.6	80 - 100	0.003 x d_1	1.5 x d_1	0.5 x d_1	120 - 160	0.015 x d_1	0.03 x d_1	0.6 x d_1	Cold air	—
1.7	60 - 80	0.0025 x d_1	1 x d_1	0.3 x d_1	100 - 120	0.01 x d_1	0.025 x d_1	0.6 x d_1	Cold air	—
1.8	40 - 60	0.0025 x d_1	1.5 x d_1	0.1 x d_1	80 - 100	0.01 x d_1	0.02 x d_1	0.6 x d_1	Cold air	—
1.9	20 - 40	0.002 x d_1	1.5 x d_1	0.05 x d_1	60 - 80	0.007 x d_1	0.015 x d_1	0.6 x d_1	Cold air	—
2										
2.1 - 2.2	100 - 160	0.005 x d_1	1.5 x d_1	1 x d_1	180 - 200	0.05 x d_1	0.07 x d_1	0.6 x d_1	Cold air / Pressurized air	—
2.3 - 2.4	80 - 120	0.004 x d_1	1 x d_1	1 x d_1	160 - 180	0.04 x d_1	0.07 x d_1	0.6 x d_1	Cold air / Pressurized air	—
3										
3.2 - 3.3	140 - 160	0.005 x d_1	1 x d_1	1 x d_1	180 - 200	0.04 x d_1	0.07 x d_1	0.6 x d_1	—	Emulsion / MQL
3.4 - 3.5	120 - 140	0.005 x d_1	1 x d_1	1 x d_1	160 - 180	0.04 x d_1	0.06 x d_1	0.6 x d_1	—	Emulsion / MQL
8										
8.1	140 - 160	0.006 x d_1	1.5 x d_1	1 x d_1	200 - 220	0.05 x d_1	0.07 x d_1	0.6 x d_1	—	Emulsion / MQL
9										
9.2	60 - 100	0.004 x d_1	1 x d_1	1 x d_1	100 - 140	0.035 x d_1	0.07 x d_1	0.6 x d_1	—	Emulsion / MQL

End mills HPC-Jet-Cut Duplex – long design

Internal standard

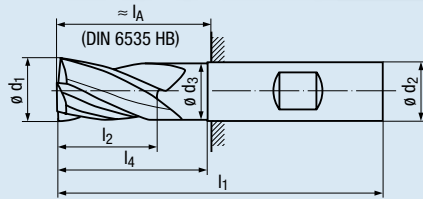

θd_1	l_2	l_1	l_4	I_A	θd_2	θd_3	t_{max}	R_{3D}	r_1 / r_2	Z	Shank acc. DIN 6535 HA	Shank acc. DIN 6535 HB
-0.04					h_5						Article no.	Article no.
8	19	68	30	32	8	7.7	0.3	1.0	3.9 / 0.8	4	2612AZ.008	2613AZ.008
10	22	80	35	40	10	9.5	0.4	1.2	4.9 / 1.0	4	2612AZ.010	2613AZ.010
12	26	93	45	47	12	11.5	0.4	1.6	5.9 / 1.2	4	2612AZ.012	2613AZ.012
16	32	108	55	60	16	15.5	0.5	2.2	7.8 / 1.6	4	2612AZ.016	2613AZ.016




t_{max} = Maximum residual material produced by radius deviation from R_{3D}
 R_{3D} = Radius to be programmed in the CAM
 r_1 = Face radius
 r_2 = Tangential radius between face radius and circumference cutting edge

	HPC and roughing applications				HSC and high-feed machining				Cooling	Lubrication
	v_c [m/min]	f_z [mm]	a_p max. [mm]	a_e max. [mm]	v_c [m/min]	f_z max. [mm]	a_p max. [mm]	a_e [mm]		
1										
1.1	140 - 160	0.004 x d_1	1.5 x d_1	1 x d_1	280 - 300	0.04 x d_1	0.06 x d_1	0.6 x d_1	Cold air / Pressurized air	Emulsion / MQL
1.2	140 - 160	0.004 x d_1	1.5 x d_1	1 x d_1	260 - 280	0.03 x d_1	0.05 x d_1	0.6 x d_1	Cold air / Pressurized air	Emulsion / MQL
1.3	120 - 140	0.0035 x d_1	1 x d_1	1 x d_1	240 - 260	0.025 x d_1	0.04 x d_1	0.6 x d_1	Cold air / Pressurized air	—
1.4	100 - 120	0.003 x d_1	1 x d_1	1 x d_1	220 - 240	0.025 x d_1	0.04 x d_1	0.6 x d_1	Cold air / Pressurized air	—
1.5	80 - 100	0.003 x d_1	1 x d_1	0.7 x d_1	180 - 200	0.02 x d_1	0.035 x d_1	0.6 x d_1	Cold air / Pressurized air	—
1.6	80 - 100	0.0025 x d_1	1.5 x d_1	0.35 x d_1	120 - 160	0.015 x d_1	0.03 x d_1	0.6 x d_1	Cold air	—
1.7	60 - 80	0.0025 x d_1	1 x d_1	0.2 x d_1	100 - 120	0.01 x d_1	0.02 x d_1	0.6 x d_1	Cold air	—
1.8	40 - 60	0.002 x d_1	1.5 x d_1	0.05 x d_1	80 - 100	0.01 x d_1	0.015 x d_1	0.6 x d_1	Cold air	—
1.9	40 - 60	0.002 x d_1	1.5 x d_1	0.05 x d_1	60 - 80	0.007 x d_1	0.015 x d_1	0.6 x d_1	Cold air	—
2										
2.1 - 2.2	100 - 160	0.005 x d_1	1.5 x d_1	1 x d_1	180 - 200	0.05 x d_1	0.06 x d_1	0.6 x d_1	Cold air / Pressurized air	—
2.3 - 2.4	80 - 120	0.004 x d_1	1 x d_1	1 x d_1	160 - 180	0.04 x d_1	0.06 x d_1	0.6 x d_1	Cold air / Pressurized air	—
3										
3.2 - 3.3	140 - 160	0.005 x d_1	1 x d_1	1 x d_1	180 - 200	0.04 x d_1	0.06 x d_1	0.6 x d_1	—	Emulsion / MQL
3.4 - 3.5	120 - 140	0.005 x d_1	1 x d_1	1 x d_1	160 - 180	0.04 x d_1	0.06 x d_1	0.6 x d_1	—	Emulsion / MQL
8										
8.1	140 - 160	0.006 x d_1	1.5 x d_1	1 x d_1	200 - 220	0.05 x d_1	0.07 x d_1	0.6 x d_1	—	Emulsion / MQL
9										
9.2	60 - 100	0.004 x d_1	1 x d_1	1 x d_1	100 - 140	0.035 x d_1	0.06 x d_1	0.6 x d_1	—	Emulsion / MQL

Cold-air nozzle – Increasing efficiency

Principle of the cold-air nozzle

The application of cooled air can help to reduce temperatures in the cutting area, which in turn permits higher cutting speeds and longer tool life. This type of cooling is necessary to bring out all the advantages of modern coatings, because the cutting edge can no longer be damaged by thermal shock. In addition, the cold-air nozzle will help to remove the tiny chips which are produced in copy milling even from deep recesses or cavities. The function of the cold-air nozzle is based on the principle of the vortex tube, in which two opposed, rotating air streams are generated (without using any moving components). The internal air stream exits from one end, in the form of useable cold air with a temperature down to $-40\text{ }^{\circ}\text{C}$. The only thing that is needed is a normal pressurized air connection.

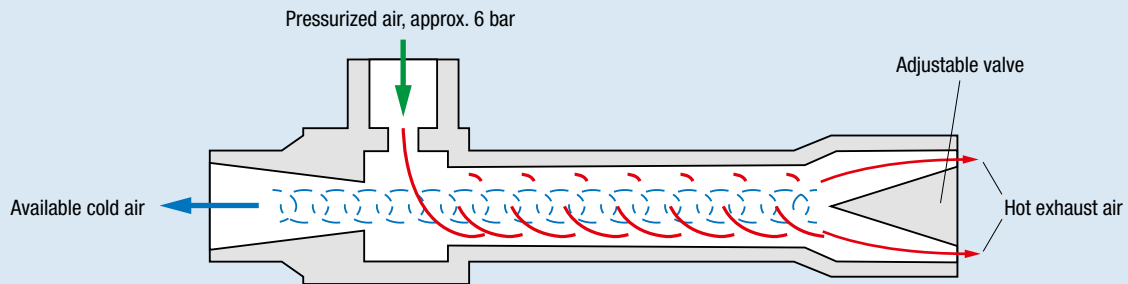

Temperature, measured on the effective exit of the vortex tube (not the end of the nozzle!)

Pressure of incoming air bar	Temperature of usable air in $^{\circ}\text{C}$, with a cold air percentage of		
	25%	50%	75%
3	-31	-22	- 6
4	-35	-35	- 8
5	-39	-28	-10
6	-42	-31	-11
7	-46	-34	-13

Air consumption, with an incoming air temperature of $21\text{ }^{\circ}\text{C}$

Input pressure bar	Air consumption	Capacity
6,9	7.08 l/s \cong 25.5 m ³ /h	226 kcal/h \cong 263 W

	Article no.
Cold-air nozzle	6910.15

Delivery:

- Length (without hose) 225 mm, weight: 0.7 kg
- With flexible hose (length approx. 300 mm) for cold air
- Muffler (SN14) for hot exhaust air
- Ball-valve with fitting (1/4") for inlet hose (6 mm) with quick-change attachment (7.2 mm)

Accessories for cold-air nozzle

Spare hose



Length	Article no.
\approx 300 mm	6910.20
\approx 400 mm	6910.22
\approx 500 mm	6910.21

Fixture complete



Weight	Article no.
0.4 kg	6910.25

Magnetic shoe



Diameter	Article no.
80 mm	6910.26

Socket



Height	Article no.
\approx 75 mm	6910.27

Description of material groups

Material group	Material type	Tensile strength range	Material examples		
1	Steel materials				
1.1	Cold-extrusion steels, Magnetic soft iron	≤ 400 N/mm ²	Q-St37-3 R-Fe80	1.0123 1.1014	
1.2	Free-cutting steels, General construction steels	≤ 600 N/mm ²	9SMnPb28 St37-2	1.0718 1.0037	500-700 N/mm ² 340-470 N/mm ²
1.3	Free-cutting steels, Construction steels, Alloyed steels, Steel castings	≤ 850 N/mm ²	St70-2 GS-25CrMo4	1.0070 1.7218	700-900 N/mm ² 650-950 N/mm ²
1.4	Cementation steels, Heat-treatable steels, Nitriding steels, Cold work steels	≤ 1100 N/mm ²	16MnCr5 Ck45 100Cr6	1.7131 1.1191 1.3505	500-700 N/mm ² 600-800 N/mm ² 700-900 N/mm ²
1.5	Heat-treatable steels, Nitriding steels, Hot work steels, Hardened steels up to 44 HRC Cold work steels	≤ 1400 N/mm ²	42CrMo4V X30WCrV5-3 X38CrMoV5-3 X155CrVMo12-1	1.7225 1.2567 1.2367 1.2379	1200-1400 N/mm ² 1100 N/mm ² 900-1100 N/mm ² 900-1100 N/mm ²
1.6	Hardened steels > 44 - 55 HRC		55NiCrMoV6	1.2713	47-52 HRC
1.7	Hardened steels > 55 - 60 HRC		45WCrV7	1.2542	56-57 HRC
1.8	Hardened steels > 60 - 63 HRC		X155CrVMo12-1	1.2379	60-63 HRC
1.9	Hardened steels > 63 - 66 HRC		X210CrW12	1.2436	63-64 HRC
1.10	Corrosion-proof steels, Acid-proof steels, Heat-resistant steels	≤ 850 N/mm ²	X10NiCrAlTi32-20 [INCOLOY800] X12CrNiTi18-9 X6CrNiMoTi17-12-2	1.4876 1.4878 1.4571	610-850 N/mm ² 500-700 N/mm ² 500-730 N/mm ²
1.11	Corrosion-/Acid-proof steels, Heat-resistant steels	≤ 1100 N/mm ²	X45SiCr4	1.4704	900-1100 N/mm ²
1.12	Corrosion-/Acid-proof steels, Heat-resistant steels	≤ 1400 N/mm ²	X5NiCrTi26-15	1.4980	1200 N/mm ²
1.13	Special steel materials	≤ 1400 N/mm ²	FerroTiC Hardox500		800-900 N/mm ² 1300-1400 N/mm ²
2	Cast materials				
2.1	Cast iron		GG 20 GG 30	0.6020 0.6030	120-220 HB 220-270 HB
2.2	Cast iron with nodular graphite		GGG 40 GGG 70	0.7040 0.7070	400 N/mm ² 700-1050 N/mm ²
2.3	Cast iron with vermicular graphite		GGV (80% Perlit) GGV (100% Perlit)		220 HB 230 HB
2.4	Malleable cast iron		GTW 40 GTS 65	0.8040 0.8165	360-420 N/mm ² 580-650 N/mm ²
2.5	Hard castings up to 400 HB				- 400 HB
3	Copper, Copper alloys, Bronze, Brass				
3.1	Pure copper and low alloyed copper	≤ 500 N/mm ²	E-Cu	2.0060	250-350 N/mm ²
3.2	Copper-zinc alloys (brass, long-chipping)		CuZn40 [Ms60] CuZn37 [Ms63]	2.0360 2.0321	340-490 N/mm ² 310-550 N/mm ²
3.3	Copper-zinc alloys (brass, short-chipping)		CuZn39Pb2 [Ms58]	2.0380	380-500 N/mm ²
3.4	Copper-aluminium alloys (alubronze, long-chipping) Copper-tin alloys (bronze, long-chipping)		CuAl10Ni	2.0966	500-800 N/mm ²
3.5	Copper-tin alloys (bronze, short-chipping)		GCuSn5ZnPb [Rg5] GCuSn7ZnPb [Rg7]	2.1096 2.1090	150-300 N/mm ² 150-300 N/mm ²
3.6	Special copper alloys, up to Q 18		Ampco16		630 N/mm ²
3.7	Special copper alloys over Q 18		Ampco20		600 N/mm ²
4	Nickel/Cobalt alloys				
4.1	Nickel/Cobalt alloys heat-resistant	≤ 850 N/mm ²	NiCu30Fe [MONEL400]	2.4360	420-610 N/mm ²
4.2	Nickel/Cobalt alloys high-heat resistant	850 - 1400 N/mm ²	NiCr19NbMo [INCONEL718]	2.4668	850-1190 N/mm ²
4.3	Nickel/Cobalt alloys high-heat resistant	> 1400 N/mm ²	Haynes 25 (L605)		1550-2000 N/mm ²
5	Aluminium alloys				
5.1	Aluminium wrought alloys		Al 99.5 [F13] AlCuMg1 [F39]	3.0255 3.1325	100-250 N/mm ² 300-500 N/mm ²
5.2	Aluminium cast alloys Si ≤ 5%		G-AlMg3	3.3541	130-190 N/mm ²
5.3	Aluminium cast alloys 5% < Si ≤ 12 %		GD-AlSi9Cu3 GD-AlSi12	3.2163 3.2582	240-310 N/mm ² 220-300 N/mm ²
5.4	Aluminium cast alloys 12 % < Si ≤ 17%		G-AlSi17Cu4		180-250 N/mm ²
6	Magnesium alloys				
6.1	Magnesium wrought alloys		MgAl6	3.5662	300-500 N/mm ²
6.2	Magnesium cast alloys		GMgAl9Zn1	3.5912	300-500 N/mm ²
7	Titanium, Titanium alloys				
7.1	Pure titanium, Titanium alloys	≤ 900 N/mm ²	Ti3 [Ti99.4] TiAl6V4	3.7055 3.7164	700 N/mm ² 700-900 N/mm ²
7.2	Titanium alloys	900 - 1250 N/mm ²	TiAl4Mo4Sn2	3.7185	900-1250 N/mm ²
8	Synthetics				
8.1	Duroplastics (short-chipping)		BAKELIT		110 N/mm ²
8.2	Thermoplastics (long-chipping)		HOSTALEN		80 N/mm ²
8.3	Fibre-reinforced synthetics		CFK / GFK / AFK		800-1500 N/mm ²
9	Materials for special applications				
9.1	Graphite		C-8000		60 N/mm ²
9.2	Tungsten-copper alloys		W-Cu 80/20		230-250 HV



AUSTRIA

EMUGE Präzisionswerkzeuge GmbHPummerinplatz 2 · 4490 St. Florian
Tel. +43-7224-80001 · Fax +43-7224-80004

BELGIUM

EMUGE-FRANKEN B.V.Handelsstraat 28 · 6851EH Huissen · NETHERLANDS
Tel. +31-26-3259020 · Fax +31-26-3255219

BRAZIL

EMUGE-FRANKEN Ferramentas de Precisão Ltda.Ouvidor Peleja, 452 - Vila Mariana
São Paulo - SP, Brasil, 04128-000
Tel. +55-11-3805-5066 · Fax +55-11-2275-7933

CANADA

EMUGE Corp.1800 Century Drive · West Boylston, MA 01583-2121 · USA
Tel. +1-508-595-3600, +1-800-323-3013 · Fax +1-508-595-3650

CHINA

EMUGE-FRANKEN Precision Tools (Suzhou) Co. Ltd.No. 728 Fengting Avenue · Weiting Town
Suzhou Industrial Park · 215122 Suzhou
Tel. +86-512-62860560 · Fax +86-512-62860561

CZECH REPUBLIC

EMUGE-FRANKEN servisni centrum, s.r.o.Molákova 8 · 62800 Brno-Líšeň
Tel. +420-5-44423261 · Fax +420-5-44233798

DENMARK

EMUGE-FRANKEN ABToldbodgade 18, 5.sal · 1253 København K
Tel. +45-70-257220 · Fax +45-70-257221

FINLAND

Emuge-Franken ABEtelä Esplanadi 24 · 00130 Helsinki
Tel. +35-8-207415740 · Fax +35-8-207415749

FRANCE

EMUGE SARL2, Bd de la Libération · 93284 Saint Denis Cedex
Tel. +33-1-55872222 · Fax +33-1-55872229

GREAT BRITAIN

EMUGE U.K. Limited2 Claire Court, Rawmarsh Road · Rotherham S60 1RU
Tel. +44-1709-364494 · Fax +44-1709-364540

HUNGARY

EFT Szerszámok és Technológiák Magyarország Kft.Gyár u. 2 · 2040 Budaörs
Tel. +36-23-500041 · Fax +36-23-500462

INDIA

EMUGE IndiaPlot No.: 92 & 128, Kondhanpur, Taluka: Haveli · District Pune-412 205
Tel. +91-20-24384941 · Fax +91-20-24384028

ITALY

EMUGE-FRANKEN S. r. l.Via Carnevali, 116 · 20158 Milano
Tel. +39-02-39324402 · Fax +39-02-39317407

JAPAN

EMUGE-FRANKEN K. K.Nakamachidai 1-32-10-403 · Tsuzuki-ku Yokohamashi, 224-0041
Tel. +81-45-9457831 · Fax +81-45-9457832

LUXEMBOURG

Dirk Gerson OttoGässelweg 16a · 64572 Büttelborn · GERMANY
Tel. +49-6152-910330 · Fax +49-6152-910331

MALAYSIA

EMUGE-FRANKEN (Malaysia) SDN BHDNo. 603, 6th Fl., West Wing, Wisma Consplant II, No. 7
Jalan SS 16/1, Subang Jaya, Selangor Darul Ehsan
Tel. +60-3-56366407 · Fax +60-3-56366405

NETHERLANDS

EMUGE-FRANKEN B.V.Handelsstraat 28 · 6851EH Huissen
Tel. +31-26-3259020 · Fax +31-26-3255219**EMUGE-Werk Richard Glimpel GmbH & Co. KG · Fabrik für Präzisionswerkzeuge**

Nürnberger Straße 96-100 · 91207 Lauf · GERMANY · Tel. +49 (0) 9123 / 186-0 · Fax +49 (0) 9123 / 14313

FRANKEN GmbH & Co. KG · Fabrik für Präzisionswerkzeuge

Frankenstraße 7/9a · 90607 Rückersdorf · GERMANY · Tel. +49 (0) 911 / 9575-5 · Fax +49 (0) 911 / 9575-327

info@emuge-franken.com · www.emuge-franken.com · www.frankentechnik.de



NORWAY

Emuge Franken Teknik ASNedre Åsemulvegen 6 · 6018 Ålesund
Tel. +47-70169870 · Fax +47-70169872

POLAND

EMUGE-FRANKEN Technikul. Marysińska 29 · 04-606 Warszawa
Tel. +48-22-8796731 · Fax +48-22-8796760

PORTUGAL

EMUGE-FRANKENAv. António Augusto de Aguiar, nº 108 - 8º andar · 1050-019 Lisboa
Tel. +351-213146314 · Fax +351-213526092

ROMANIA

EMUGE-FRANKEN Tools Romania SRLStr. Tulcea, Nr. 24/3 · 400594 Cluj-Napoca
Tel. +40-264-597600 · Fax +40-264-597600

RUSSIA

OOO EMUGE-FRANKENOffice 711, 713, 715 · Business Center „OBUKHOV-CENTER“
Pr. Obukhovskoy oborony, 271, „A“ · Saint-Petersburg, 192 012
Tel. +7-812-3193019 · Fax +7-812-3193018

SERBIA

EMUGE-FRANKEN Tooling Service d.o.o.Adi Endre ul.77 · 24400 Senta
Tel. +381-24-817000 · Fax +381-24-817000

SINGAPORE

Eureka Tools Pte Ltd.194 Pandan Loop # 04-10 · Pantech Industrial Complex · Singapore 128383
Tel. +65-6-8745781 · Fax +65-6-8745782

SLOVAK REPUBLIC

EMUGE-FRANKEN nástroje spol. s.r.o.Lubovnicková 19 · 84107 Bratislava
Tel. +421-2-6453-6635 · Fax +421-2-6453-6636

SLOVENIA

EMUGE-FRANKEN tehnika d.o.o.Streliška ul. 25 · 1000 Ljubljana
Tel. +386-1-4301040 · Fax +386-1-2314051

SOUTH AFRICA

EMUGE S.A. (Pty.) Ltd.2, Tandela House, Cnr. 12th Ave. & De Wet Street · 1610 Edenvale
Tel. +27-11-452-8510/1/2/3/4 · Fax +27-11-452-8087

SPAIN

EMUGE-FRANKEN, S.L.Calle Frutuós Gelabert, 2-4 4º 1º · 08970 Sant Joan Despí (Barcelona)
Tel. +34-93-4774690 · Fax +34-93-3738765

SWEDEN

EMUGE FRANKEN ABHagalundsvägen 43 · 70230 Örebro
Tel. +46-19-245000 · Fax +46-19-245005

SWITZERLAND

RIWAG Präzisionswerkzeuge AGWinkelbüel 4 · 6043 Adligenswil
Tel. +41-41-3756600 · Fax +41-41-3756601

THAILAND

EMUGE-FRANKEN (Thailand) co., ltd.1213/54 Ladphrao 94, Khwaeng/Khet Wangthonglang · Bangkok 10310
Tel. +66-2-559-2036,(-8) · Fax +66-2-530-7304

TURKEY

EMUGE-FRANKEN Hassas Kesici Takım San. Ltd. Şti.Atatürk Mah. Girne Cad. No:30 Kat:3 D. 7
34758 Ataşehir İstanbul
Tel. +90-216-455-1272 · Fax +90-216-455-6210

USA

EMUGE Corp.1800 Century Drive · West Boylston, MA 01583-2121
Tel. +1-508-595-3600, +1-800-323-3013 · Fax +1-508-595-3650

VIETNAM

VIAT33-Ho Dac Di Street · Dong Da Dist Hanoi
Tel. +84-4-5333120 · Fax +84-4-5333215